


CP- UNC-TB30ZL3**3 MP Full HD IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 3MP PS CMOS Image Sensor
- Max 20fps@3M and 25/30fps@1080P
- H.264 and MJPEG dual-stream encoding
- DWDR, Day/Night(ICR), Auto Iris, 3DNR, AWB, AGC, BLC
- 2.8 -12mm Motorized Lens
- IR Range of 30 Mtrs, IP66, PoE
- Mobile Software: iCMOB, gCMOB, wCMOB
- CMS Software: KVMS Pro, vOptimus Pro

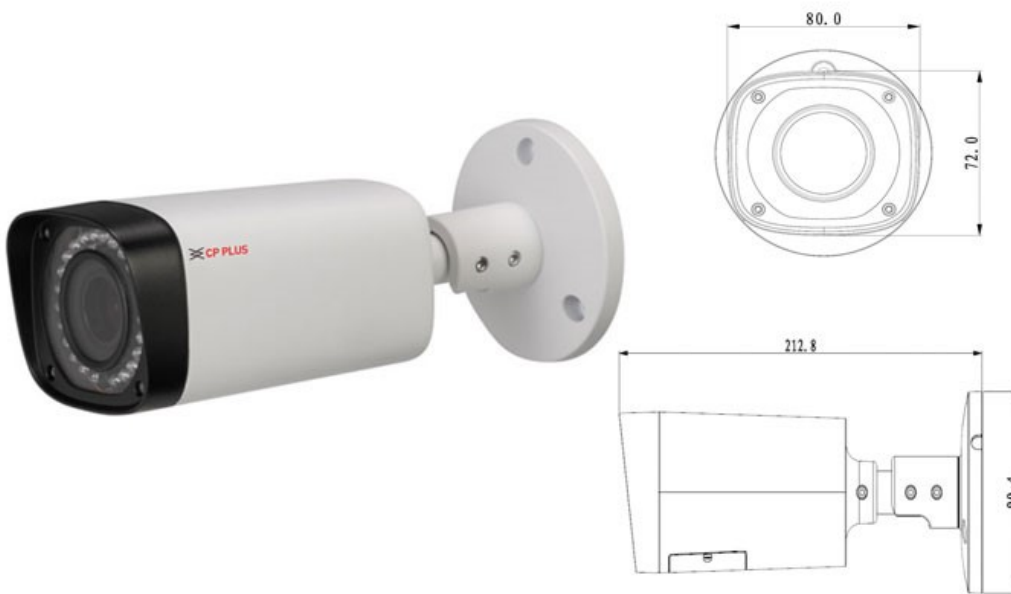

CP- UNC-TB30ZL3

3 MP Full HD IR Bullet Camera - 30Mtr.

Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Gain Control(AGC)
Lens
Back Light Compensation
S/N Ratio
Video Compression
Video Streaming
Resolution
Privacy Mask
ICR

Specification

1/3" 3MP Progressive scan CMOS
0.01Lux/F1.4 (Color), 0Lux/F1.4(IR on)
Auto/Manual, 1/3(4)~1/10000s
Auto/Manual
Auto/Manual
2.8 -12mm Motorized Lens
BLC/ HLC/ DWDR
More than 55dB
H.264/MJPEG
Main Stream: 3M(1~20fps)/1080P/720P(1~25/30fps), Extra Stream: D1/CIF(1 ~ 25/30fps)
3M(2048× 1536)/1080P(1920× 1080) / 720P(1280× 720) /D1(704× 576) /CIF(352× 288)
Up to 4 areas
Auto(ICR)/Color/B/W

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP,RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS,Bonjour, ONVIF, PSIA, CGI

RJ-45 (10/100Base-T)
20 Users
iPhone, iPad, Android, Windows Phone
IR Range of 30 Mtr.
-30°C~+60°C , Less than 90%RH
DC12V/PoE (802.3af)
Max 7W
IP66
72mm × 80mm × 212.8mm
650g

Protocol

Ethernet

User Account

Smart Phone

IR

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight