


CP- UVC-DA40L2**4MP Full HD IR HDCVI Dome Camera - 20Mtr.****Main Features**

- 1/2.7" 4MP PS CMOS Image Sensor
- Max 30fps@4MP
- DWDR, Day/Night (ICR), 2D-DNR, AWB, AGC, BLC, HLC
- 3.6mm lens (2.8mm, 6mm optional)
- OSD Menu, control over coaxial cable, 2D-DNR
- IR Range of 20 Mtrs., IP67
- HD, SD, and Two Others Analog formats output switchable

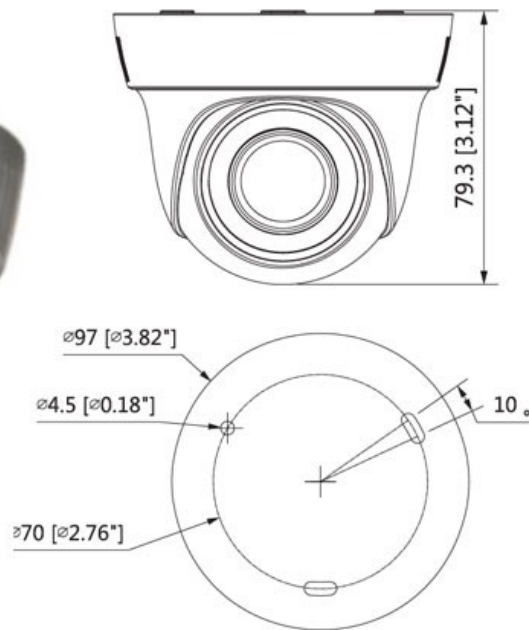

CP- UVC-DA40L2

4MP Full HD IR HDCVI Dome Camera - 20Mtr.



Feature

Image Sensor
Minimum Illumination
Effective Pixels
Shutter Speed
White Balance
Gain Control (AGC)
Lens
Back Light Compensation
S/N Ratio
Angle of View
Video Streaming
Video Output
ICR
OSD
IR
No. of IR LEDs
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

1/2.7" PS CMOS
0.03Lux/F2.0, 30IRE, 0Lux IR on
2560x1440 , 4MP
PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Auto / Manual
Auto/Manual
3.6mm (2.8mm, 6mm Optional)
BLC / HLC / DWDR
More than 65dB
H: 76.4° (97°/48.6°) V: 41.6° (52°/27.9°)
25/30fps@4MP, 25/30fps@1080P
1-channel BNC high definition video output / CVBS video output (Can switch)
Auto (ICR) / Manual
Multi-language
IR Range of 20 Mtr.
12pcs
-40°C~+60°C / Less than 95%RH
12V DC ±30%
Max. 3.7W (12V DC, IR on)
IP67
Plastic
Φ97mm×79.3mm
0.19kg