

AIR-LAP1131AG-P-K9 Datasheet

[Get a Quote](#)

Overview

Cisco® Aironet® 1130AG Series IEEE 802.11a/b/g access point AIR-LAP1131AG-P-K9 provides high-capacity, high-security, enterprise-class features in an unobtrusive, office-class design, delivering WLAN access with the lowest total cost of ownership. With high-performing dual IEEE 802.11a and 802.11g radios, the Cisco Aironet 1130AG Series provides a combined capacity of up to 108 Mbps to meet the needs of growing WLANs. Hardware-assisted Advanced Encryption Standard (AES) or temporal key integrity protocol (TKIP) encryption provides uncompromised support for interoperable IEEE 802.11i, Wi-Fi Protected Access 2 (WPA2) or WPA security. The Cisco Aironet 1130AG Series uses radio and network management features for simplified deployment, along with built-in omnidirectional antennas that provide robust and predictable WLAN coverage for offices and similar RF environments. The competitively priced Cisco Aironet 1130AG Series is ready to install and easy to manage, reducing the cost of deployment and ongoing maintenance.

Quick Spec

Figure 1 shows the appearance of AIR-LAP1131AG-P-K9.

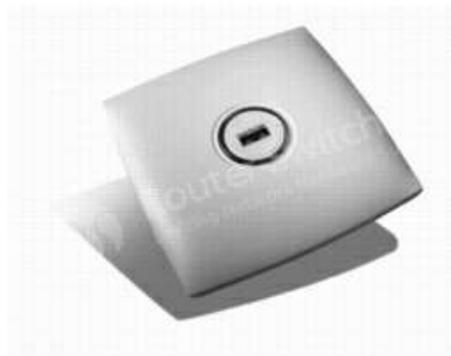


Table 1 shows the quick spec.

Part Number	AIR-LAP1131AG-P-K9
Product Description	802.11ag LWAPP AP Integrated Antennas Japan2 Cnfg 1130AG Series Access Points
System Memory	<ul style="list-style-type: none"> • 32 MB RAM • 16 MB FLASH
Input Power Requirements	<ul style="list-style-type: none"> • 100-240 VAC; 50-60Hz (power supply) • 36-57 VDC (device)
Power Draw	12.2W maximum
Dimensions (H x W x D)	7.5 in. x 7.5 in. x 1.3 in. (19.1 x 19.1 x 3.3 cm)
Weight	1.5 lb (0.67 kg)
Network Standard	IEEE 802.11a, 802.11b, and 802.11g
Data Rates Supported	<ul style="list-style-type: none"> • 802.11a: 6, 9, 12, 18, 24, 36, 48, and 54 Mbps • 802.11g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, and 54 Mbps

Compare to Similar Items

Table 2 shows the comparison between AIR-LAP1131AG-P-K9 and AIR-LAP1131AG-A-K9.

Part Number	AIR-LAP1131AG-P-K9	AIR-LAP1131AG-A-K9
-------------	--------------------	--------------------

Product Description	802.11ag LWAPP AP Integrated Antennas Japan2 Cnfg 1130AG Series Access Points	802.11ag LWAPP AP Integrated Antennas FCC Cnfg 1130AG Series Access Points
System Memory	<ul style="list-style-type: none"> • 32 MB RAM • 16 MB FLASH 	<ul style="list-style-type: none"> • 32 MB RAM • 16 MB FLASH
Input Power Requirements	<ul style="list-style-type: none"> • 100-240 VAC; 50-60Hz (power supply) • 36-57 VDC (device) 	<ul style="list-style-type: none"> • 100-240 VAC; 50-60Hz (power supply) • 36-57 VDC (device)
Power Draw	12.2W maximum	12.2W maximum
Dimensions (H x W x D)	7.5 in. x 7.5 in. x 1.3 in. (19.1 x 19.1 x 3.3 cm)	7.5 in. x 7.5 in. x 1.3 in. (19.1 x 19.1 x 3.3 cm)
Weight	1.5 lb (0.67 kg)	1.5 lb (0.67 kg)

Get more information

Do you have any question about the AIR-LAP1131AG-P-K9? Contact

us now via [Live Chat](#) or sales@gntme.com.

Specification

AIR-LAP1131AG-P-K9 Specification

Part Number	AIR-LAP1131AG-P-K9
Product Description	802.11ag LWAPP AP Integrated Antennas Japan2 Cnfg 1130AG Series Access Points
Software	<ul style="list-style-type: none"> • Cisco IOS Software Release 12.3(8)JA or later (autonomous). • Cisco IOS Software Release 12.3(11)JX or later (Lightweight Mode).
Data Rates Supported	<ul style="list-style-type: none"> • 802.11a: 6, 9, 12, 18, 24, 36, 48, and 54 Mbps • 802.11g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, and 54 Mbps
Network Standard	IEEE 802.11a, 802.11b, and 802.11g
Uplink	Autosensing 802.3 10/100BASE-T Ethernet

Frequency Band and Operating Channels	<p>Americas (FCC)</p> <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.15 to 5.35, 5.725 to 5.825 GHz; 12 channels <p>China</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.725 to 5.825 GHz; 4 channels <p>ETSI</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.15 to 5.725 GHz; 19 channels <p>Israel</p> <ul style="list-style-type: none"> • 2.432 to 2.472 GHz; 9 channels • 5.15 to 5.35 GHz; 8 channels <p>Japan (TELEC)</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels Orthogonal Frequency Division Multiplexing (OFDM) • 2.412 to 2.484 GHz; 14 channels Complementary Code Keying (CCK) • 5.15 to 5.25 GHz; 4 channels <p>Japan-P (TELEC 2 (Japan2) Cnfg)</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels Orthogonal Frequency Division Multiplexing (OFDM) • 2.412 to 2.484 GHz; 14 channels Complementary Code Keying (CCK) • 5.15 to 5.35 GHz; 8 channels <p>Japan-Q</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels Orthogonal Frequency Division Multiplexing (OFDM) • 2.412 to 2.484 GHz; 14 channels Complementary Code Keying (CCK) • 5.15 to 5.35 GHz; 8 channels • 5.470 to 5.725 GHz; 11 channels <p>Korea</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.15 to 5.35, 5.46 to 5.72, 5.725 to 5.825, 19 channels <p>North America</p> <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.15 to 5.35, 5.725 to 5.825 GHz; 12 channels <p>Singapore</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.15 to 5.35 GHz; 8 channels and 5.725 to 5.825 GHz; 12 channels <p>Taiwan</p> <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.25-5.35 GHz, 5.725 to 5.825, 7 channels 				
Nonoverlapping Channels	802.11a: Up to 19	802.11b/g: 3			
Receive Sensitivity (Typical)	<table border="0"> <tr> <td style="vertical-align: top;"> 802.11a: 6 Mbps: -87 dBm 9 Mbps: -86 dBm 12 Mbps: -85 dBm 18 Mbps: -84 dBm 24 Mbps: -80 dBm 36 Mbps: -78 dBm 48 Mbps: -73 dBm 54 Mbps: -71 dBm </td> <td style="vertical-align: top;"> 802.11g: 1 Mbps: -93 dBm 2 Mbps: -91 dBm 5.5 Mbps: -88 dBm 6 Mbps: -86 dBm 9 Mbps: -85 dBm 11 Mbps: -85 dBm 12 Mbps: -85 dBm 18 Mbps: -84 dBm 24 Mbps: -83 dBm 36 Mbps: -79 dBm 48 Mbps: -77 dBm 54 Mbps: -72 dBm 60 Mbps: -70 dBm </td> </tr> </table>			802.11a: 6 Mbps: -87 dBm 9 Mbps: -86 dBm 12 Mbps: -85 dBm 18 Mbps: -84 dBm 24 Mbps: -80 dBm 36 Mbps: -78 dBm 48 Mbps: -73 dBm 54 Mbps: -71 dBm	802.11g: 1 Mbps: -93 dBm 2 Mbps: -91 dBm 5.5 Mbps: -88 dBm 6 Mbps: -86 dBm 9 Mbps: -85 dBm 11 Mbps: -85 dBm 12 Mbps: -85 dBm 18 Mbps: -84 dBm 24 Mbps: -83 dBm 36 Mbps: -79 dBm 48 Mbps: -77 dBm 54 Mbps: -72 dBm 60 Mbps: -70 dBm
802.11a: 6 Mbps: -87 dBm 9 Mbps: -86 dBm 12 Mbps: -85 dBm 18 Mbps: -84 dBm 24 Mbps: -80 dBm 36 Mbps: -78 dBm 48 Mbps: -73 dBm 54 Mbps: -71 dBm	802.11g: 1 Mbps: -93 dBm 2 Mbps: -91 dBm 5.5 Mbps: -88 dBm 6 Mbps: -86 dBm 9 Mbps: -85 dBm 11 Mbps: -85 dBm 12 Mbps: -85 dBm 18 Mbps: -84 dBm 24 Mbps: -83 dBm 36 Mbps: -79 dBm 48 Mbps: -77 dBm 54 Mbps: -72 dBm 60 Mbps: -70 dBm				
Available Transmit Power Settings (Maximum Power Setting Will Vary by Channel and According to Individual Country Regulations)	802.11a: OFDM: 17 dBm (50 mW) 15 dBm (30 mW) 14 dBm (25 mW) 11 dBm (12 mW) 8 dBm (6 mW) 5 dBm (3 mW) 2 mW (2 dBm) -1 dBm (1 mW)	802.11b: CCK: 20 dBm (100 mW) 17 dBm (50 mW) 14 dBm (25 mW) 11 dBm (12 mW) 8 dBm (6 mW) 5 dBm (3 mW) 2 dBm (2 mW) -1 dBm (1 mW)	802.11g: OFDM: 17 dBm (50 mW) 14 dBm (25 mW) 11 dBm (12 mW) 8 dBm (6 mW) 5 dBm (3 mW) 2 dBm (2 mW) -1 dBm (1 mW)		
Range	Indoor (Distance Across Open Office Environment):		Outdoor:		

	<p>802.11a:</p> <ul style="list-style-type: none"> 80 ft (24 m) @ 54 Mbps 150 ft (45 m) @ 48 Mbps 200 ft (60 m) @ 36 Mbps 225 ft (69 m) @ 24 Mbps 250 ft (76 m) @ 18 Mbps 275 ft (84 m) @ 12 Mbps 300 ft (91 m) @ 9 Mbps 325 ft (100 m) @ 6 Mbps 	<p>802.11g:</p> <ul style="list-style-type: none"> 100 ft (30 m) @ 54 Mbps 175 ft (53 m) @ 48 Mbps 250 ft (76 m) @ 36 Mbps 275 ft (84 m) @ 24 Mbps 325 ft (100 m) @ 18 Mbps 350 ft (107 m) @ 12 Mbps 360 ft (110 m) @ 11 Mbps 375 ft (114 m) @ 9 Mbps 400 ft (122 m) @ 6 Mbps 420 ft (128 m) @ 5.5 Mbps 440 ft (134 m) @ 2 Mbps 450 ft (137 m) @ 1 Mbps 	<p>802.11a:</p> <ul style="list-style-type: none"> 100 ft (30 m) @ 54 Mbps 300 ft (91 m) @ 48 Mbps 425 ft (130 m) @ 36 Mbps 500 ft (152 m) @ 24 Mbps 550 ft (168 m) @ 18 Mbps 600 ft (183 m) @ 12 Mbps 625 ft (190 m) @ 9 Mbps 650 ft (198 m) @ 6 Mbps 	<p>802.11g:</p> <ul style="list-style-type: none"> 120 ft (37 m) @ 54 Mbps 350 ft (107 m) @ 48 Mbps 550 ft (168 m) @ 36 Mbps 650 ft (198 m) @ 24 Mbps 750 ft (229 m) @ 18 Mbps 800 ft (244 m) @ 12 Mbps 820 ft (250 m) @ 11 Mbps 875 ft (267 m) @ 9 Mbps 900 ft (274 m) @ 6 Mbps 910 ft (277 m) @ 5.5 Mbps 940 ft (287 m) @ 2 Mbps 950 ft (290 m) @ 1 Mbps
<p>Ranges and actual throughput vary based upon numerous environmental factors so individual performance may differ.</p>				
<p>Compliance</p>	<p>Standards</p> <p>Safety</p> <ul style="list-style-type: none"> • UL 60950-1 • CAN/CSA-C22.2 No. 60950-1 • UL 2043 • IEC 60950-1 • EN 60950-1 • NIST FIPS 140-2 level 2 validation <p>Radio Approvals</p> <ul style="list-style-type: none"> • FCC Part 15.247, 15.407 • RSS-210 (Canada) • EN 300.328, EN 301.893 (Europe) • ARIB-STD 33 (Japan) • ARIB-STD 66 (Japan) • ARIB-STD T71 (Japan) • AS/NZS 4268.2003 (Australia and New Zealand) EMI and Susceptibility (Class B) • FCC Part 15.107 and 15.109 • ICES-003 (Canada) • VCCI (Japan) • EN 301.489-1 and -17 (Europe) <p>Security</p> <ul style="list-style-type: none"> • 802.11i, WPA2, WPA • 802.1X • AES, TKIP • FIPS 140-2 Pre-Validation List • Common Criteria (when running Cisco IOS software) Other • IEEE 802.11g and IEEE 802.11a • FCC Bulletin OET-65C • RSS-102 			
<p>Antennas</p>	<ul style="list-style-type: none"> • 2.4 GHz • Gain 3.0 dBi • Horizontal Beamwidth 360° • 5 GHz • Gain 4.5 dBi • Horizontal Beamwidth 360° 			
<p>Security</p>	<p>Authentication</p> <p>Security Standards</p> <ul style="list-style-type: none"> • WPA • WPA2 (802.11i) • Cisco TKIP • Cisco message integrity check (MIC) • IEEE 802.11 WEP keys of 40 bits and 128 bits <p>802.1X EAP types:</p> <ul style="list-style-type: none"> • EAP-Flexible Authentication via Secure Tunneling (EAP-FAST) • Protected EAP-Generic Token Card (PEAP-GTC) • PEAP-Microsoft Challenge Authentication Protocol Version 2 (PEAP-MSCHAP) • EAP-Transport Layer Security (EAP-TLS) • EAP-Tunneled TLS (EAP-TTLS) • EAP-Subscriber Identity Module (EAP-SIM) • Cisco LEAP <p>Encryption</p> <ul style="list-style-type: none"> • AES-CCMP encryption (WPA2) • TKIP (WPA) • Cisco TKIP • WPA TKIP • IEEE 802.11 WEP keys of 40 bits and 128 bits 			

Status LEDs	<p>External:</p> <ul style="list-style-type: none"> • Status LED indicates operating state, association status, error/warning condition, boot sequence, and maintenance status <p>Internal:</p> <ul style="list-style-type: none"> • Ethernet LED indicates activity over the Ethernet, status • Radio LED indicates activity over the radios, status
Dimensions (H x W x D)	7.5 in. x 7.5 in. x 1.3 in. (19.1 x 19.1 x 3.3 cm)
Weight	1.5 lb (0.67 kg)
Environmental	<p>Operating</p> <ul style="list-style-type: none"> • Altitude: 0 to 2500m • 32 to 104°F (0 to 40°C) • 10 to 90% humidity (noncondensing) Non <p>Operating</p> <ul style="list-style-type: none"> • -40 to 158F (-40 to 70C) • Up to 95% humidity (noncondensing)
System Memory	<ul style="list-style-type: none"> • 32 MB RAM • 16 MB FLASH
Input Power Requirements	<ul style="list-style-type: none"> • 100-240 VAC; 50-60Hz (power supply) • 36-57 VDC (device)
Power Draw	12.2W maximum

Want to Buy

[Order Now](#)
[Get a Quote](#)

Why Gntme.com

As a leading network hardware supplier, Gntme.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

Email:- sales@gntme.com

Contact:- +971 4 2409 998

WhatsApp:- +971503841786

Skype:- [imrank211](#)